ROHS

http://www.okhro.com

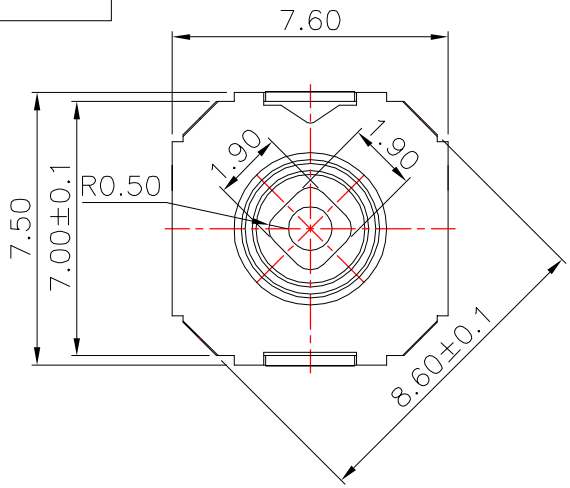

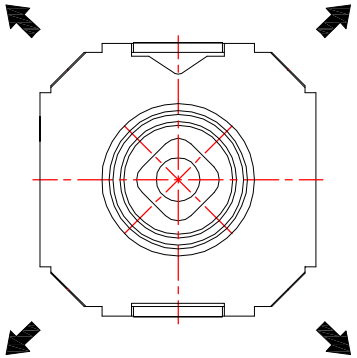

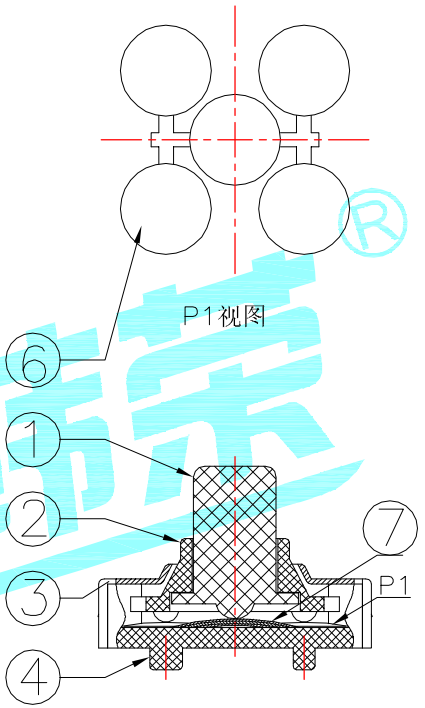

Terminal / Direction	①	②	③	④	⑤	⑥
↓		●			●	
↖	●				●	
↗				●	●	
↙			●		●	
↘					●	●

Circuit Diagram

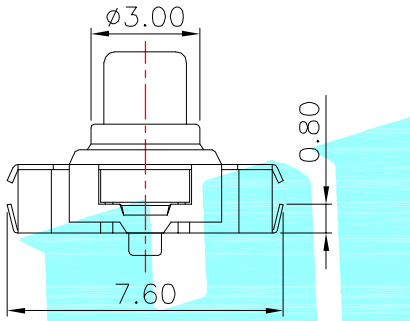

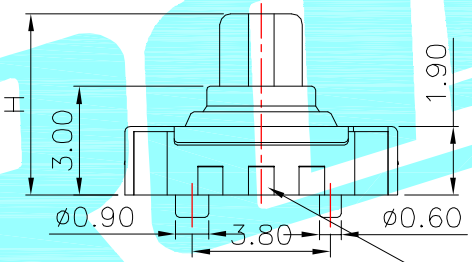

PART NO.	H
K1-5202UA-01	5.0
K1-5202UA-02	6.0

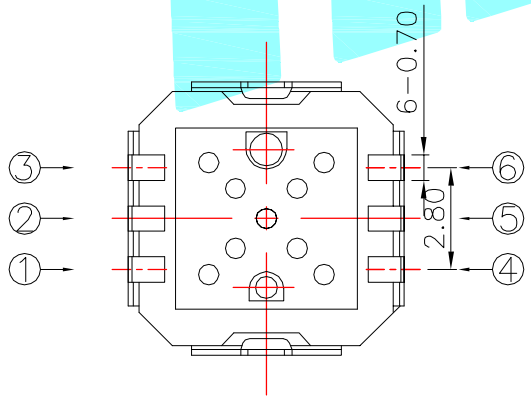

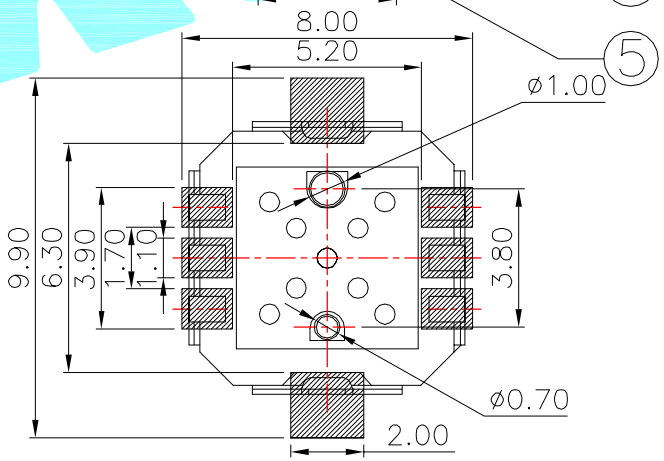

PCB Layout(Pattern Side)

NOTE:
Operating Force:
lever portion: 170 ± 35 gf
Push portion: 250gf、350gf、450gf

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Mylar	——	1	Natural	——	——
⑥	Contact 1	——	1	F.Ag/SUS	——	——
⑤	Terminal	——	6	Brass(0.15t)	Plating silver	——
④	Base	——	1	LCP	Black	
③	Cover	——	1	SUS	——	——
②	Axle sleeve	——	1	LCP	Black	——
①	Keystoke	——	1	PA46	Black	——

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——

APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/7/23	
CHECKED			
APPROVALS			

TOLERANCES ARE: 30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°

HRO鹤荣® ELECTRONICS CO.,LTD

TITLE:	MULTIFUNCTIONAL SWITCHS
PART NO.	K1-5202UA-□□
UNIT: mm	SCALE: 1:1 PROJ:
DRAWING NO.	—— SHEET 1 OF 1