



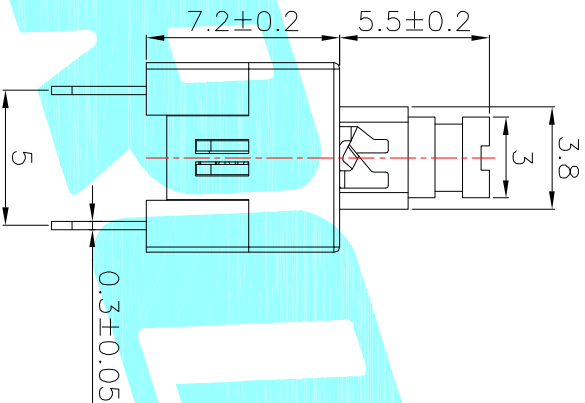
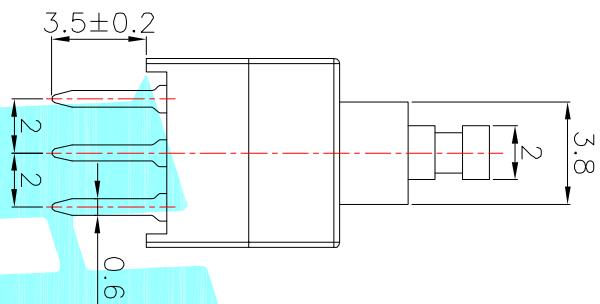




NOTE:
 1. Operating Force: 230gf±50gf
 2. Travel : 2.4±0.2mm



Circuit Diagram

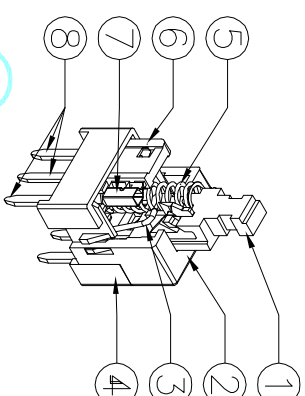

PCB Layout(Pattern Side)

NO.	Operating Type	Part No.
1	Push To Lock	K8-7071D-L1
2	Push No. Lock	K8-7071D-N1
3	Push No Sound No. Lock	K8-7071D-NN

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Terminal	—	6	Brass strip	Plating silver	—
⑦	Contact	—	2	Phosphor bronze	Plating silver	—
⑥	Securing glue	—	2	PA66	Black	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	PBT	Black	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	White	—
①	KNOB	—	1	POM	Blue	—

APPROVALS		DATE	TITLE:	
DRAWN	J.X.Zhang	2013/10/17	PUSHBUTTON SWITCHS	
CHECKED			ELECTRONICS CO.,LTD	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:
—	A	—	NEW	—	—	—	30~12.5 ±	±0.30	mm	1:1	—
—	—	—	—	—	—	—	10~30 ±	±0.20	—	—	—
—	—	—	—	—	—	—	5~10 ±	±0.15	—	—	—
—	—	—	—	—	—	—	~5 ±	±0.10	—	—	—
											SHEET 1 OF 1