



Circuit Diagram

- NOTE:
- 1.Rating: 24V 25mA DC
 - 2.Insulation Resistance: $\geq 100 \text{ M}\Omega$
 - 3.Withstand voltage:AC 500V 1Minute
 - 4.Operating Force Range: 400gf Max
 - 5.Mechanical Life:3,000 Cycles
 - 6.Operating Temperature range $-20^{\circ}\sim +70^{\circ}\text{C}$
 - 7.Ambient Humidity used: $\leq 85\% \text{RH}$

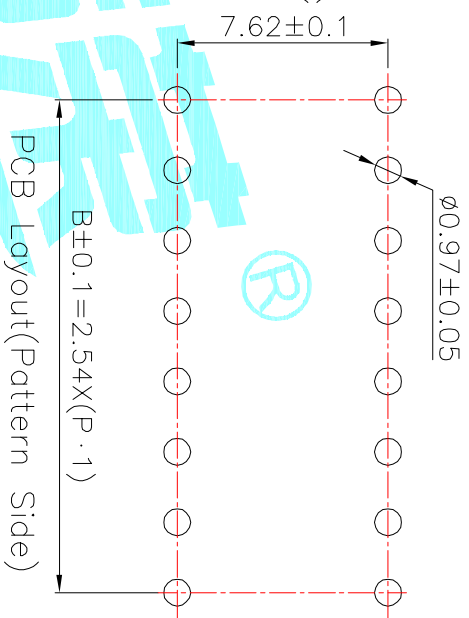

PCB Layout (Pattern Side)

凸柄(P)

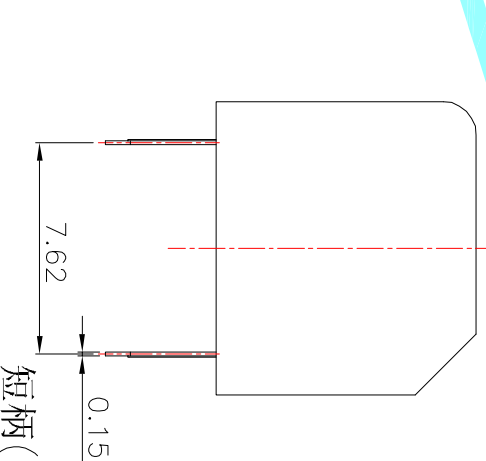

短柄(S)

Position(位数)	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM.A(长度)	6.54	9.08	11.62	14.16	16.70	19.24	21.78	24.32	26.86	31.94
DIM.B(宽度)	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94

PART NO.	凸柄(P)	短柄(S)	短柄(S)
盖字/红色(R)	DP-02RP	DP-03RS	DP-03BS
盖字/蓝色(B)	DP-02BP	DP-03BS	DP-03BS

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Gum Water	---	---	Epoite	Black	---
④	Terminal	---	---	Phosphor bronze	Au Plating	---
③	Base	---	1	PBT	Black	---
②	Cover	---	1	PBT	Red/Blue	---
①	Keystoke	---	1	PBT	White	---

APPROVALS	DATE
DRAWN J.X.Zhong	2013/11/8

ELECTRONICS CO.,LTD



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:	SHEET
	A		NEW				30°以上 10~30 5~10 ~5	± 0.30 ± 0.20 ± 0.15 ± 0.10	mm	1:1	DP-□□□□	1 OF 1