
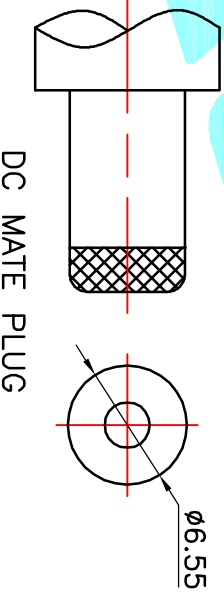


P.C.B LAYOUT(copper-sided view)

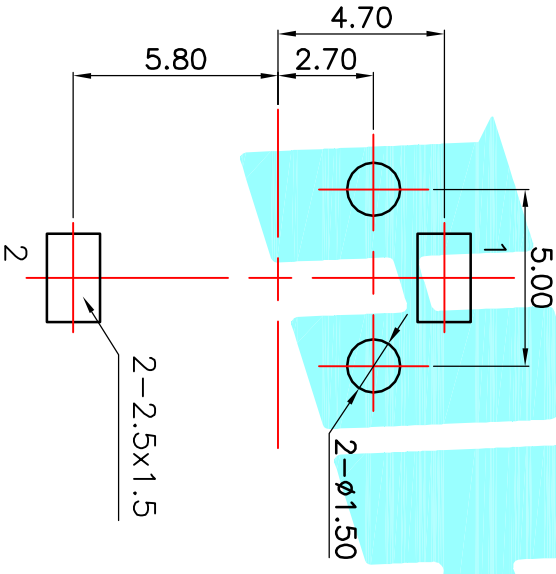

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

②	Terminal	2	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11				

OKHRO
 ELECTRONICS CO.,LTD

CHECKED		TITLE:		PART NO.		
APPROVALS		PHONE JACKES		DC-024		
TOLERANCES ARE		30 ^{±0.15}	±0.30	ANGLE	UNIT: mm	
10 ^{±0.10}	±0.20	5 ^{±0.10}	±0.15	±Z'	SCALE: 1:1	
~ 5	±0.10				PROJ.	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			