

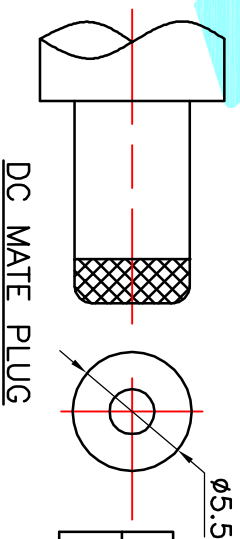


P.C.B LAYOUT(Copper-side view)

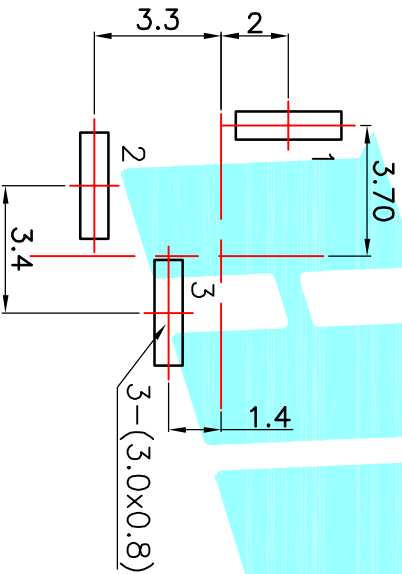

Model No.	1	2	3
PIN	φ2.0	φ2.35	φ2.5

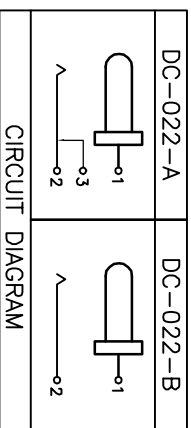

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM PART NAME	TERN.O.	QTY.	MATERIAL FINISHING
APPROVALS		DATE	REMARK
DRAWN	J.X.Zhang	2013/11/11	
CHECKED			
TITLE:		PHONE JACKES	
PART NO.		DC-022	
APPROVALS			
TOLERANCES ARE		SCALE: 1:1	
30 ^{±0.15}	±0.30	ANGLE	PROJ.
10 ^{±0.30}	±0.20	UNIT: mm	1 OF 1
5 ^{±0.10}	±0.15	DRAWING NO.	
~ 5	±0.10		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			