


Rating: DC 24V 3A
 Contact Resistance: 100 mΩ Max.
 Operating temperature: -20℃ ~ 70℃
 Operating force: 3-20N
 Operating Life: 5,000 cycles

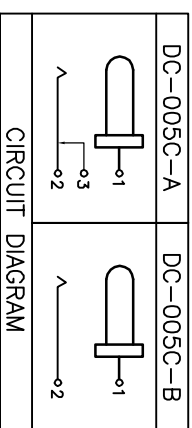

Model No.	1	2
PIN	φ2.0	φ2.5

② Terminal	3	Phosphor bronze	Ag Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS	DATE		
DRAWN	J.X.Zhang	2013/11/11	
CHECKED		TITLE: DC JACKES	
APPROVALS		PART NO. DC-005C	
ELECTRONICS CO.,LTD			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
	30 ^{±0.15}	±0.30	ANGLE			
	10 ^{±0.10}	±0.20	UNIT: mm			
	5 ^{±0.10}	±0.15	SCALE: 1:1			
	~ 5	±0.10	±Z'	DRAWING NO.		PROJ. SHEET 1 OF 1