


Circuit Diagram

| | |
|---------|--------|
| NO.1 | |
| PART NO | vigor |
| 3 | 180±30 |
| 4 | 250±30 |

| | |
|---------|--------------|
| NO.2 | |
| PART NO | MATERIAL/qTY |
| S | SUS/1PC |
| D | SUS/2PCS |

| | |
|-----------|---------------|
| NO.3-NO.4 | |
| PART NO | NOTE |
| 01~99 | SERIAL NUMBER |

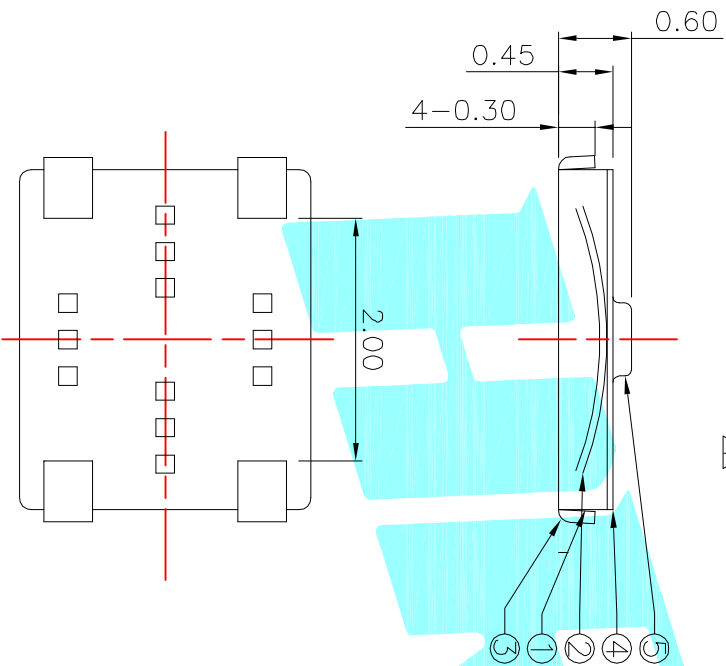

PCB Layout (Pattern Side)

Note:
Trove:0.15±0.05mm

| | | | | | | |
|------|------------|---------|------|-----------------|----------------|--------|
| ⑤ | Knob | — | 1 | PET | Black | — |
| ④ | Dust cover | — | 1 | KAPTON FILM | Yellow | — |
| ③ | Terminal | — | 4 | Phosphor Bronze | Plating silver | — |
| ② | Contact | — | 2 | F.Ag/SUS | Plating silver | — |
| ① | Base | — | 1 | Nylon | Black | — |
| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |

| | | | |
|-----------|-------------|------------|--|
| APPROVALS | | DATE | |
| DRAWN | JIANKUN.LIU | 2015.03.30 | |

| | | | |
|----------------|-------|--------------|-------------------|
| CHECKED | | TITLE: | |
| APPROVALS | | TACT SWITCHS | |
| TOLERANCES ARE | | PART NO. | K2-1836UQ-C00W-□□ |
| 30~12.5 | ±0.30 | SCALE: | 1:1 |
| 10~30 | ±0.20 | UNIT: | mm |
| 5~10 | ±0.15 | PROJ: | □ |
| ~5 | ±0.10 | DRAWING NO. | — |
| ANGLE | | SHEET 1 OF 1 | |
| ±2° | | | |

| | | | | | | |
|---------|------|-------|--------------|---------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
| | B | | NEW | | | |
| | A | | | | | |