


P C B Layout(Top view)

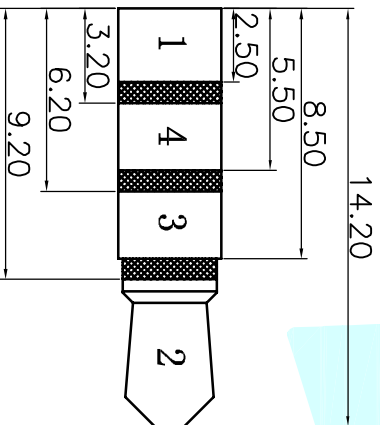

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:—25℃~80℃
 Operating force:3—20N
 Operating Life:5,000cycles

Model NO	PJ-316A-A	PJ-316A-B	PJ-316A-C
Schematic			
Model NO	PJ-316A-D	PJ-316A-E	PJ-316A-F
Schematic			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
DRAWN QIFENG.XU 2014/9/19						
CHECKED						
APPROVALS						
TOLERANCES ARE						
30 ^{±0.15}	10 ^{±0.30}	±0.20	ANGLE	±2°	DRAWING NO.	SHEET 1 OF 1
5 ^{±0.10}	±0.15	±0.10				
TITLE: PHONE JACKES			PART NO. PJ-316A			
ELECTRONICS CO.,LTD			SCALE: 1:1			
PROT. SHEET			REMARK			