


P.C.B Layout (copper-sided view)

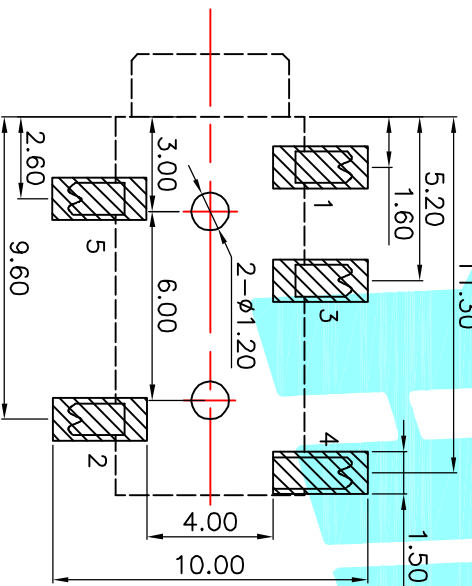

Model NO	PJ-327A-A	PJ-327A-B
Schematic		
PJ-327A-C		
PJ-327A-D		
PJ-327A-E		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  $\Delta$   
 Operating temperature:-40 $^{\circ}$ C~+80 $^{\circ}$ C  
 Operating force:3-20N  
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	B					
	A		NEW			

②	Terminal	5	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN		J.X.Zhang		2013/11/11		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. PJ-327A		
TOLERANCES ARE		30 $\pm$ 0.15		±0.30		ANGLE
		10 $\pm$ 0.30		±0.20		UNIT: mm
		5 $\pm$ 0.10		±0.15		SCALE: 1:1
				±0.10		PROJ. SHEET 1 OF 1
				DRAWING NO.		

**OKHRO**  
 ELECTRONICS CO.,LTD