
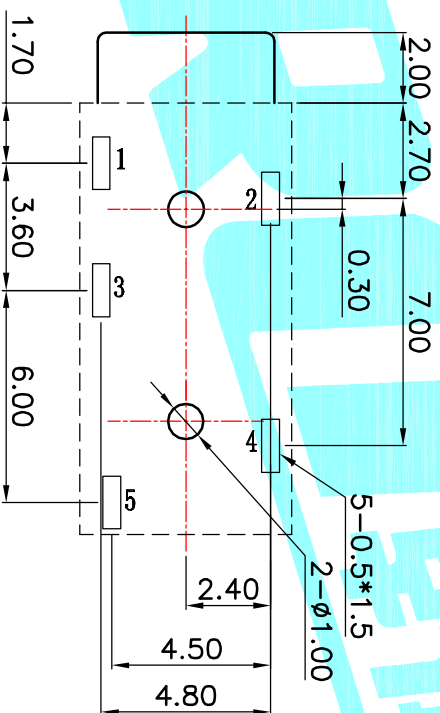


Schematic

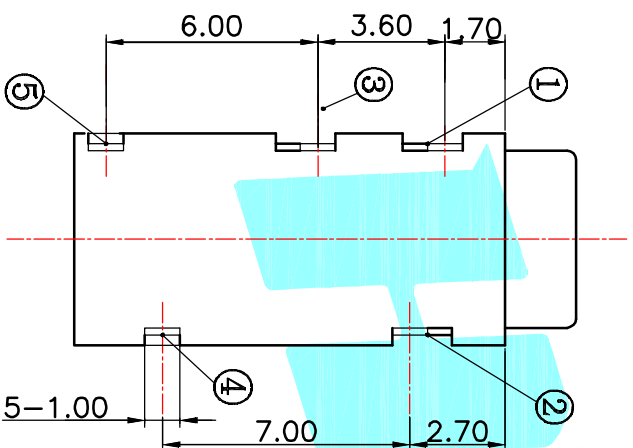

P.C.B LAYOUT(copper-sided view)

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

②	Terminal	4	Phosphor bronze	Au Plating	
①	Housing	1	Nylon	Black	
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE			

DRAWN J.X.Zhang 2013/11/11
 TITLE: PHONE JACKES

CHECKED
 APPROVALS
 PART NO. PJ-327D

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE			30 [±] 0.15	±0.30	ANGLE	
			10 [±] 0.10	±0.20	UNIT: mm	SCALE: 1:1
			5 [±] 0.10	±0.15	±Z	DRAWING NO.
						PROJ. SHEET 1 OF 1



ELECTRONICS CO.,LTD