


P.C.B LAYOUT(copper-sided view)

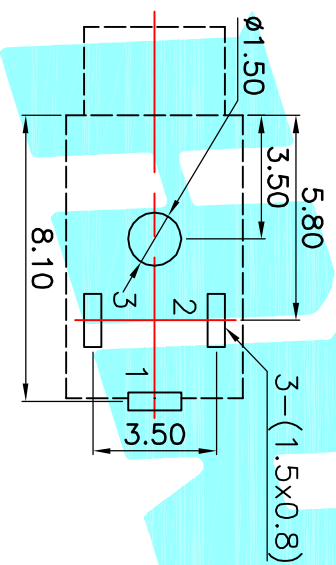

Model NO	PJ-2102
Schematic	

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>DRAWN J.X.Zhang 2013/11/11</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30^{±0.15} 10^{±0.20} 5^{±0.10} ~ 5 ±0.30 ±0.20 ±0.15 ANGLE ±2°</p>						
TITLE:			PHONE JACKES			
PART NO.			PJ-2102			
SCALE:			1:1			
DRAWING NO.			PROJ. SHEET 1 OF 1			
<p>APPROVALS</p> <p>DATE</p> <p>TERMINAL</p> <p>HOUSING</p> <p>PART NAME</p> <p>TERNO.</p> <p>QTY.</p> <p>MATERIAL</p> <p>FINISHING</p> <p>REMARK</p>						
<p>Model NO PJ-2102</p> <p>Schematic</p> <p>Terminal 3 Phosphor bronze Au Plating</p> <p>Housing 1 Nylon Black</p> <p>Terminal 01</p> <p>Terminal 02</p> <p>Terminal 03</p>						
<p>APPROVALS</p> <p>DATE</p> <p>TERMINAL</p> <p>HOUSING</p> <p>PART NAME</p> <p>TERNO.</p> <p>QTY.</p> <p>MATERIAL</p> <p>FINISHING</p> <p>REMARK</p>						
<p>DRAWN J.X.Zhang 2013/11/11</p> <p>CHECKED</p> <p>APPROVALS</p> <p>TOLERANCES ARE 30^{±0.15} 10^{±0.20} 5^{±0.10} ~ 5 ±0.30 ±0.20 ±0.15 ANGLE ±2°</p>						
TITLE:			PHONE JACKES			
PART NO.			PJ-2102			
SCALE:			1:1			
DRAWING NO.			PROJ. SHEET 1 OF 1			
<p>APPROVALS</p> <p>DATE</p> <p>TERMINAL</p> <p>HOUSING</p> <p>PART NAME</p> <p>TERNO.</p> <p>QTY.</p> <p>MATERIAL</p> <p>FINISHING</p> <p>REMARK</p>						
<p>Model NO PJ-2102</p> <p>Schematic</p> <p>Terminal 3 Phosphor bronze Au Plating</p> <p>Housing 1 Nylon Black</p> <p>Terminal 01</p> <p>Terminal 02</p> <p>Terminal 03</p>						
<p>APPROVALS</p> <p>DATE</p> <p>TERMINAL</p> <p>HOUSING</p> <p>PART NAME</p> <p>TERNO.</p> <p>QTY.</p> <p>MATERIAL</p> <p>FINISHING</p> <p>REMARK</p>						

OKHRO
 ELECTRONICS CO.,LTD