


P.C.B Layout (copper-sided view)

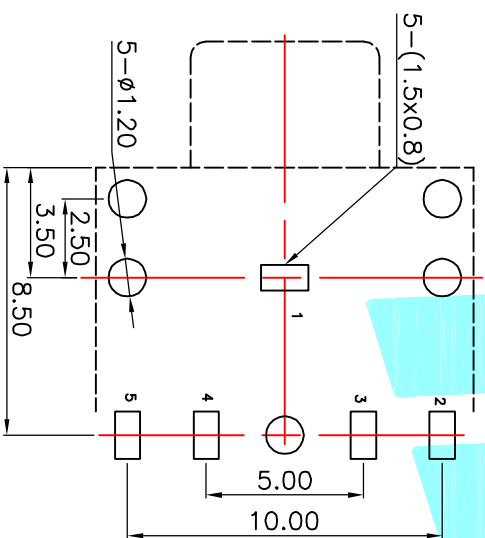

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

P/N	PJ-3126-A	PJ-3126-B	PJ-3126-C	PJ-3126-D
	PJ-3126A-A	PJ-3126A-B	PJ-3126A-C	PJ-3126A-D
Schematic	PJ-3126B-A	PJ-3126B-B	PJ-3126B-C	PJ-3126B-D

② Terminal	5	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		TITLE: PHONE JACKES		
DRAWN J.X.Zhong		2013/11/11		ELECTRONICS CO.,LTD		
CHECKED				PART NO. PJ-3126		
APPROVALS				SCALE: 1:1		
TOLERANCES ARE		30 <sup>+0.15</sup> <sub>-0.10</sub>	±0.30	ANGLE	UNIT: mm	PROJ. SHEET 1 OF 1
ECN NO.	REV. A	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
			NEW			