ROHS

http://www.okhro.com

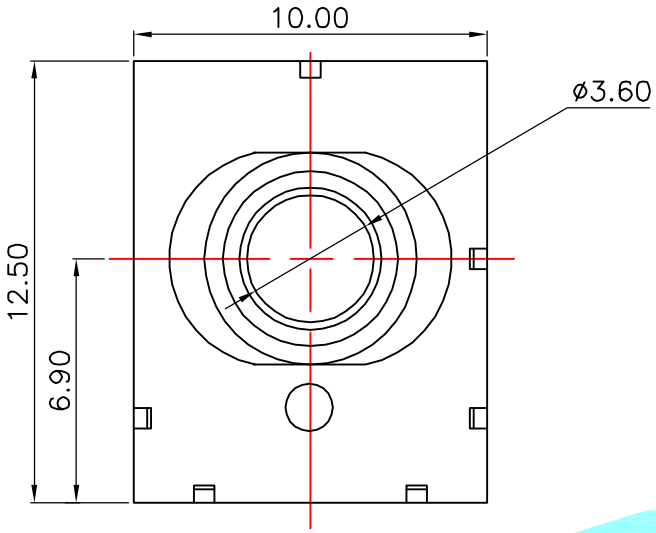

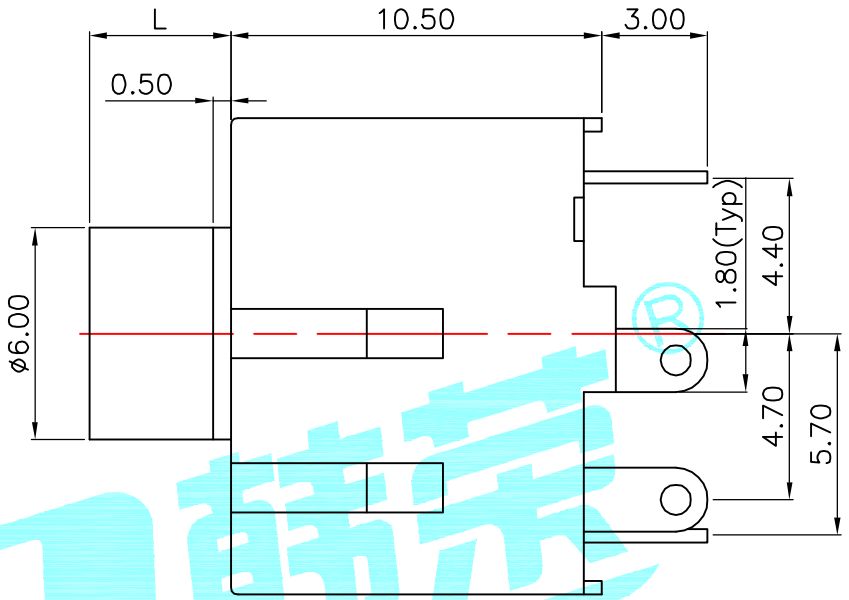

P.C.B LAYOUT(copper-sided view)

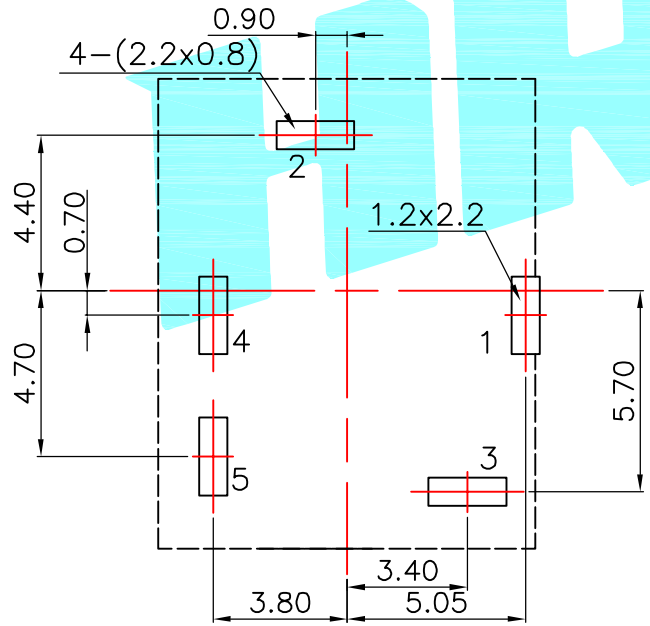

L=4.0	PJ-3540A-A	PJ-3540A-B	PJ-3540A-C
L=4.3	PJ-3540A-D	PJ-3540A-E	PJ-3540A-F
Schematic			

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	——	5	Phosphor bronze	Au Plating	——
①	Housing	——	1	Nylon	Black	——

APPROVALS		DATE	HRO精荣® ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2013/11/11		
CHECKED			TITLE:	PHONE JACKES
APPROVALS			PART NO.	PJ-3540A
TOLERANCES ARE	30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°		UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	——
				SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——