
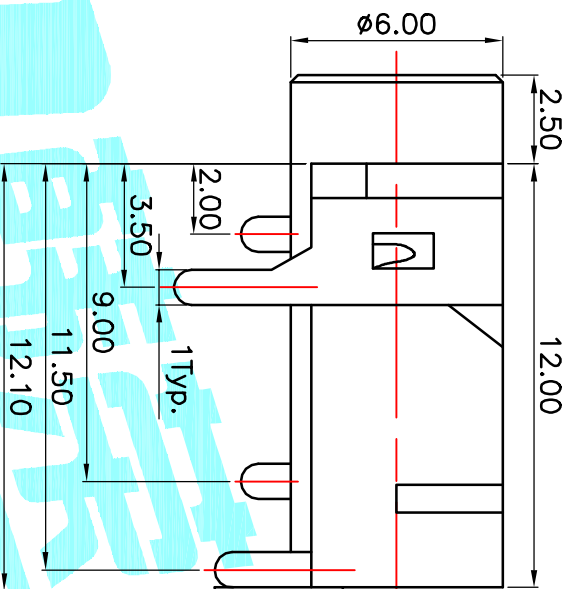


P.C.B LAYOUT(copper-sided view)

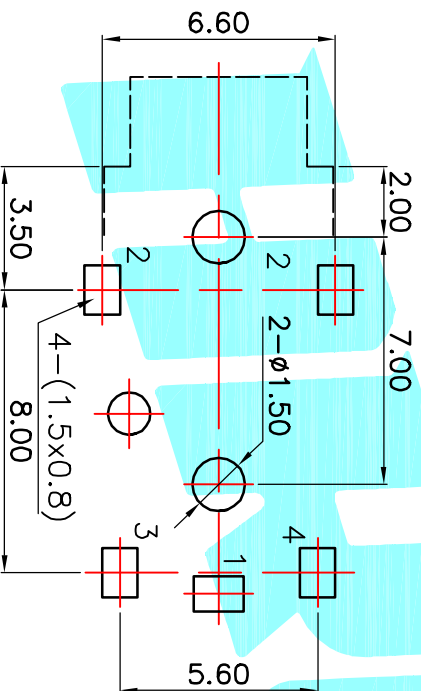

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20°C~70°C
 Operating force:3-20N
 Operating Life:5,000cycles

Model No.	PJ-3210B-A	PJ-3210B-B
Schematic		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

②	Terminal	5	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN	J.X.Zhang	2013/11/11		ELECTRONICS CO.,LTD		
CHECKED				TITLE: PHONE JACKES		
APPROVALS				PART NO. PJ-3210B		
TOLERANCES ARE		30 ^μ 以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			PROJ.
		5~10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1
		~ 5	±0.10			